INTERNATIONAL AMATEUR RADIO UNION




REGION 3

BANDPLAN




Revised: 16 October 2009

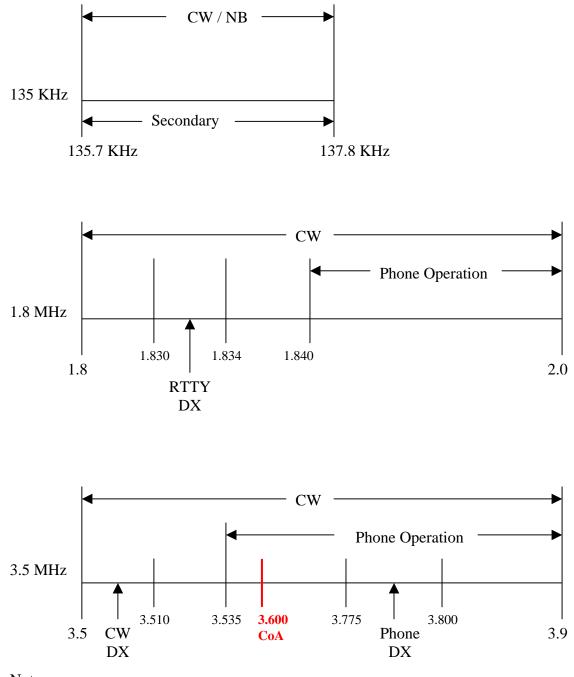


Note :

- ✓ Where the total band available nationally is 100 kHz or less, phone operation may commence at 3.525 MHz.
- ✓ Emergency CoA frequency 3.600 MHz (All Modes ± 5 KHz)

-2-IARU Region 3 Bandplan

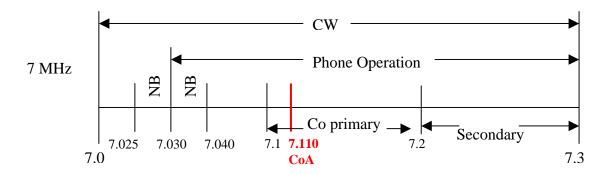


Note : Emergency CoA frequency 7.110 MHz (All Modes \pm 5 KHz)

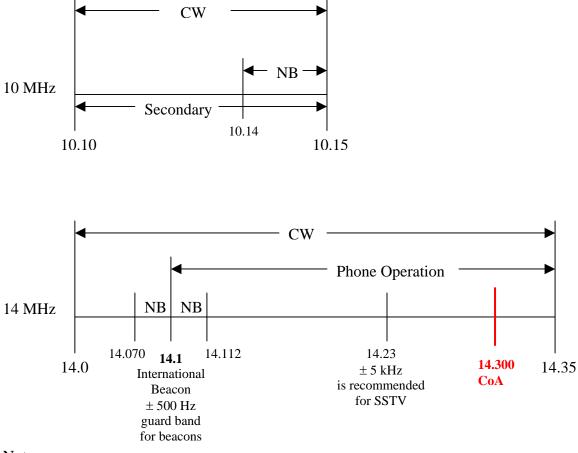


Note:

- ✓ Considering the dramatic increase in data mode usage on the 20 meter band, it is recommended that the sub-band for these classes of signals be 14.070 MHz to 14.112 MHz (with +/- 500 Hz at 14.100 MHz for beacons), and within that data sub-band the current practices of traditional data modes may continue up to 14.095 MHz with 14.095 to 14.112 MHz being reserved for other data modes including Packet.
- ✓ Emergency CoA frequency 14.300 MHz (All Modes ± 5 KHz)


-3-IARU Region 3 Bandplan

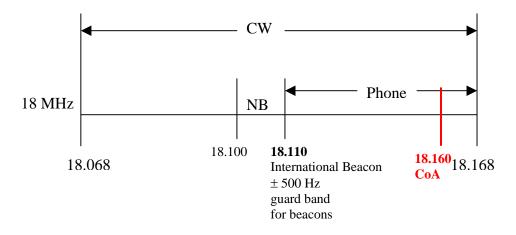


Note : Emergency CoA frequency 18.160 MHz (All Modes \pm 5 KHz)

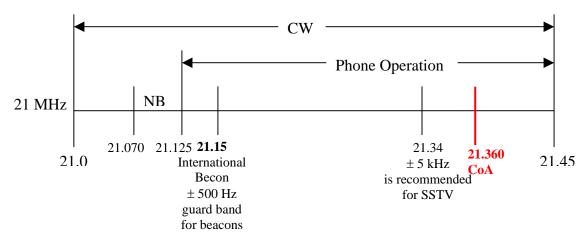


Note : Emergency CoA frequency 21.360 MHz (All Modes \pm 5 KHz)

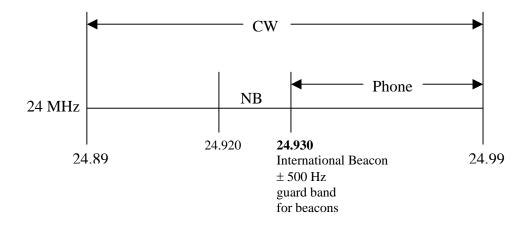

-4-IARU Region 3 Bandplan

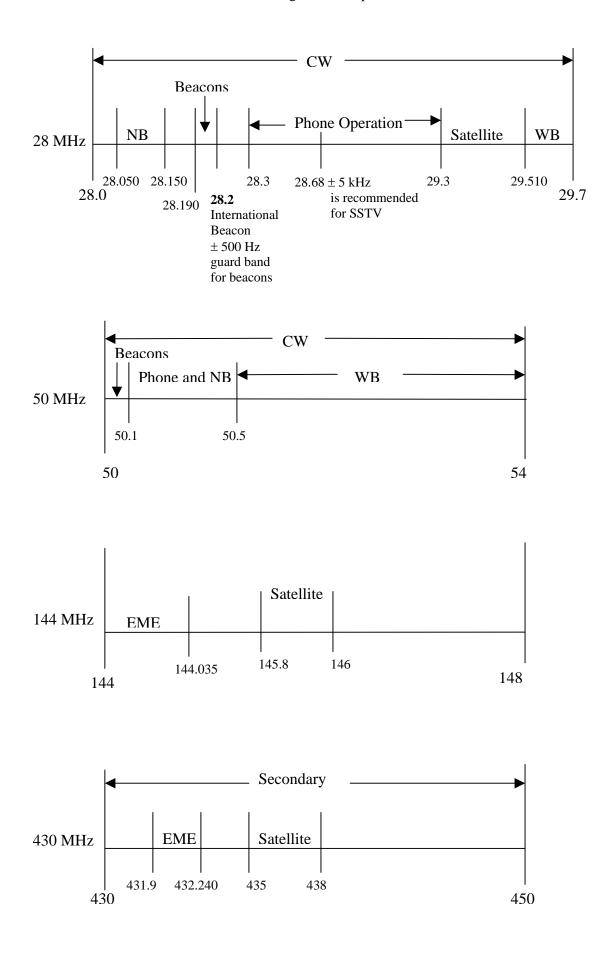

-5-IARU Region 3 Bandplan

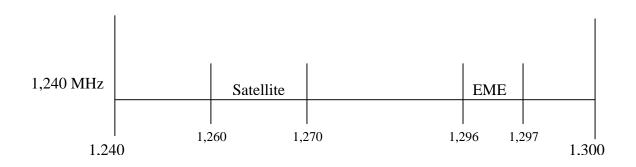

Bands above 1300 MHz:

Societies should consult with the amateur satellite community for proposed satellite operating frequencies before deciding local bandplans above 1300 MHz.

The Basic Principles Underlying the IARU Region 3 Bandplan:

(1) In all cases of conflict between a bandplan and the national regulations of a country, the latter shall prevail.

(2) Nothing in these bandplans shall be construed as prohibiting different national arrangements, provided that harmful interference is not caused to stations in countries operating in accordance with the regional bandplan.

(3) Notwithstanding item 2 above, Member Societies of IARU Region 3 are strongly urged to use these regional bandplans as a basis for their national bandplans.

[Legends]

| CoA: | Emergency Centre of Activity frequency |
|------------|---|
| EME: | Earth-Moon-Earth, Meteor Scatter, Auroral Scatter and other weak- |
| | signal |
| NB: | Narrow band modes including CW, RTTY, Packet and modes with |
| | similar bandwidth not exceeding 2 kHz. |
| Phone: | Phone operation includes SSTV, FAX and modes with similar |
| | bandwidth not exceeding 2 kHz. |
| Satellite: | This segment should be kept clear of other operating modes. |
| Secondary: | At 7.2 to 7.3 MHz, amateur stations shall not cause harmful |
| | interference to stations of the Broadcasting Service. |
| WB: | Wide band modes including FM. |

Adopted at the IARU R3 14th conference, Christchurch New Zealand 2009